



Control the locos of your TWIN/Center/Intellibox by using the Z21 App, multiMAUS, ...

L-BUS


With Z21 FW V1.22 or higher, the Z21 can be configured as LocoNet slave by using Z21_Maintenance.exe

Z21 LocoNet Slave Cable

136100



This throttle is just one example for all the other devices connected to the LocoNet-T BUS.

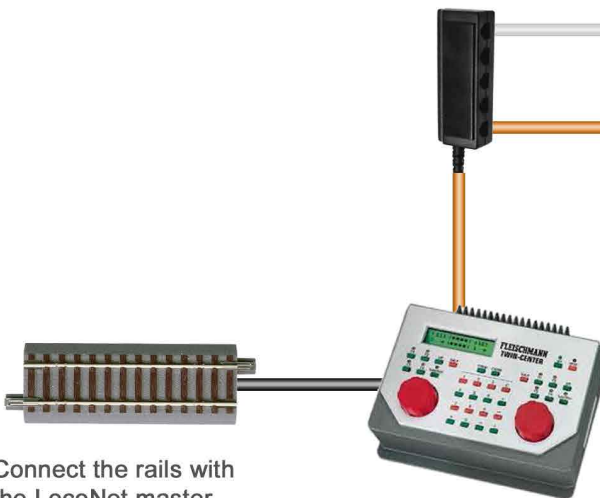

Connect the rails with the LocoNet master.

This digital command station is the LocoNet master. In this use case, the Z21 is used as gateway between the TWIN-CENTER/Intellibox and all the Z21-throttles or Z21-Apps. It is now possible to control your layout not only with the TWIN-CENTER/Intellibox and its LocoNet throttles, but also with the Z21-App on the smartphone/tablet and multiMAUS at the same time!

Because the Z21 was not originally planned to be used as LocoNet slave, please consider following information:



In order to avoid that the Z21 and the existing LocoNet master both provide the supply voltage at the same time, the supply voltage must be isolated on the L-BUS-connector (pin1 and pin6) at the Z21.

In order to do so, please use solely the white „Z21 LocoNet Slave Cable“ with the spare part number 136100. Please ask your local dealer or buy it online at roco.cc – Service – Spare parts. Using the wrong cable can damage the digital control unit!